



	E Q U I P A G G I A M E N T I	ATTACCO RAPIDO A GHIERA QUICK COUPLING WITH NUT AR1 G1/2-D.15	(I)	(GB)	5 01
	T E C N I L A V A G G I O		22/04/09		



SPECIFICHE TECNICHE
SPECIFICATIONS

- PRESSIONE NOMINALE RATED PRESSURE	250 bar – 25 MPa (3650 psi)
- PRESSIONE CONSENTITA PERMISSIBLE PRESSURE	280 bar – 28 MPa (4050 psi)
- PORTATA MASSIMA MAX FLOW RATE	40 l/min (10.5 USG p.m.)
- TEMPERATURA MASSIMA MAX WORKING TEMPERATURE	160° C (320 °F)
- MATERIALE MATERIAL	GIRELLO IN PLASTICA ANTIURTO E GUARNIZIONI OR IN VITON. BODY IN SHOCKPROOF PLASTIC AND VITON O-RING

MISURE D'INGOMBRO
OVERALL DIMENSIONS

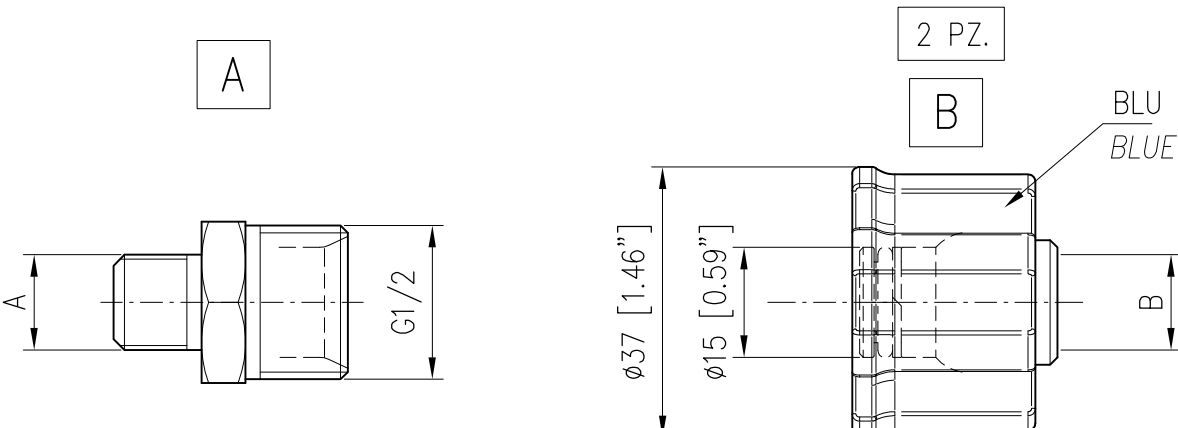

CODICE CODE	A
26.0115.31	G1/4M

CODICE CODE	B
2 PZ. 26.0110.20	G1/4F